


Product specification

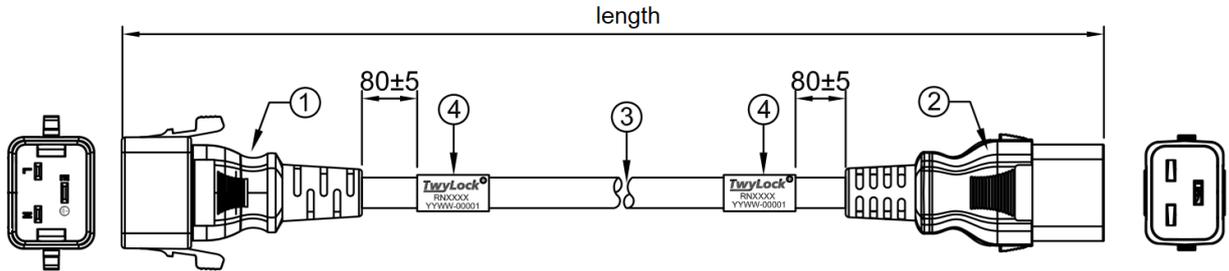

① IEC 60320 C20 TwyLock® male connector

Locks in most snap-in sockets of major PDU manufacturers.
Pull force 30lbs (14kg) during 1 minute


② IEC 60320 C19 TwyLock® female connector

Locks in all common appliances with C20 socket

③ Cable


Type: H05VV-F3G-1.5mm² SJTW-15AWG-3C-105°C

④ S/N Label

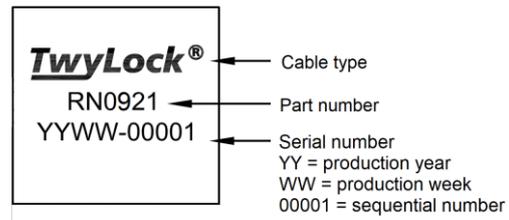

General Specifications

- Rating 16A/250V
- Temperature range -5 to +105°C
- Delivered in bundles of 10pcs, rolled

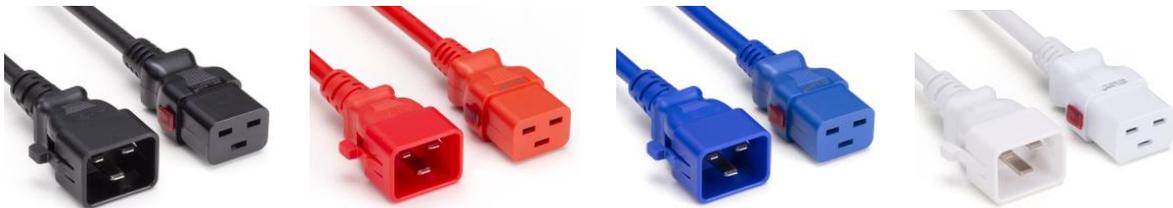

Product range

RN09xy (x specifies the length and y the color)

y = color	black	red Pantone 032C	blue Pantone 661C	white RAL 9016
x = length				
0.5m (1.6ft)	RN0911	RN0912	RN0913	RN0914
1.0m (3.3ft)	RN0921	RN0922	RN0923	RN0924
1.5m (5ft)	RN0931	RN0932	RN0933	RN0934
2.0m (6.6ft)	RN0941	RN0942	RN0943	RN0944
2.5m (8.2ft)	RN0951	RN0952	RN0953	RN0954
3.0m (10ft)	RN0961	RN0962	RN0963	RN0964

Approvals and Compliance



- UL/CUL according to file E115330
- TUV certificates no. R50400892 and R50236631
- RoHS
- REACH
- WEEE

Disclaimer: Copyright © 2023 Riedo Networks Ltd. All rights reserved. RNX and TwyLock are registered trademarks of Riedo Networks Ltd. Every effort has been made to ensure that the information in this product datasheet is accurate. Anyway, the information in this product datasheet is subject to change without notice and should not be construed as a commitment by Riedo Networks Ltd. Riedo Networks Ltd assumes no responsibility or liability for any errors or inaccuracies that may appear in this product datasheet.